


# LED Industrial Lighting

## Advanced LED Lighting Solutions

### Material

High purity aluminum reflector, heat sink and hanging hook;  
Aluminum alloy housing;  
Acrylic glass cover;  
Powerful LED with high efficiency LED driver;

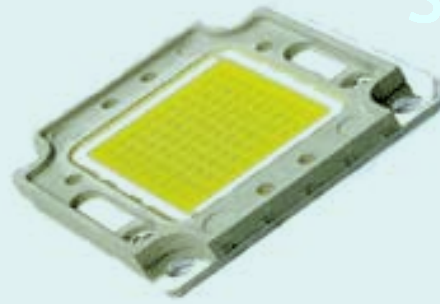

### Features

Uses a single powerful LED as the light source; utilizes the specially designed multichip single module and a high brightness semiconductor chip.

Integrated design for the heat sink and housing. Heat from the LED is removed through the heat dissipation wing and also by the air cross-ventilation. Ideal for humid environments.

5 - 10 year life depending on usage.

The lights are waterproof and dustproof and have passed the anodic oxidation and plastic spraying tests. Meets IP65 standards.

Energy savings over 50%.

No ill glare; no flickering;

No lead, hydrargyrum or any other harmful chemicals.

Reaches its intensity of light instantly unlike other light sources.

The industrial light is controlled by constant current and voltage.

Most color ranges can be achieved.

2-Year Warranty  
(repair or replacement)



“bringing renewable  
& efficient alternatives  
to home environments”

**BREATHE**  
**SYSTEMS**®

[www.breathesystems.com](http://www.breathesystems.com)

Switzerland +41 44 586 77 00 | UK +44 121 288 8383 | USA +1 646 217 0888 | Hong Kong +852 8197 2777 | Australia +61 7 3103 3357


# LED Industrial Lighting

## SE40IL Series



Model	LED Power	Input Voltage	Frequency	Power Factor	Lumens / Watt	Initial Luminous Flux
SE-40IL030W	30W	85V - 265V AC	50Hz - 60Hz	>0.9	80lm	2400lm
SE-40IL040W	40W	85V - 265V AC	50Hz - 60Hz	>0.9	80lm	3200lm
SE-40IL050W	50W	85V - 265V AC	50Hz - 60Hz	>0.9	80lm	4000lm
SE-40IL060W	60W	85V - 265V AC	50Hz - 60Hz	>0.9	80lm	4800lm
SE-40IL070W	70W	85V - 265V AC	50Hz - 60Hz	>0.9	80lm	5600lm
SE-40IL100W	100W	85V - 265V AC	50Hz - 60Hz	>0.9	80lm	8000lm

Also compatible with 12V, 24V & 36V DC

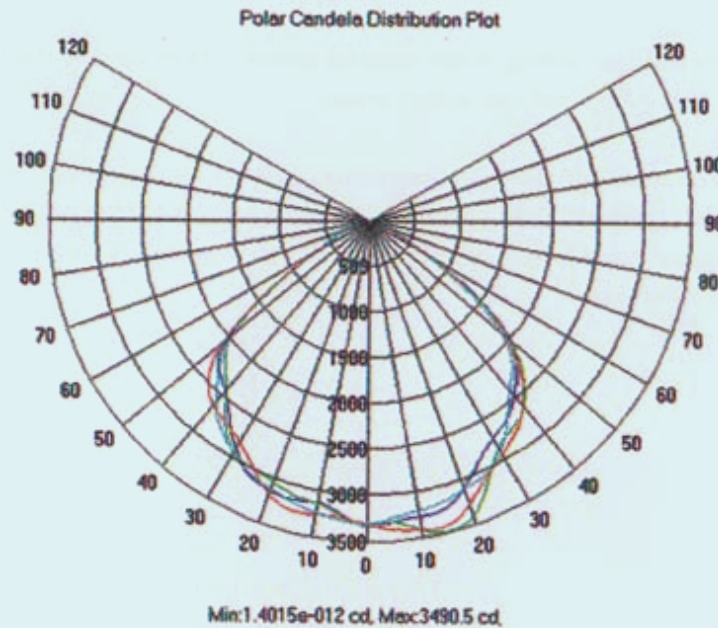

Efficiency of Light	Effective Light Angle	Color Rendering Index	Color Temperature	Life Span	Net Weight
>90%	60°	Ra>80	2700K~7000K	>30,000 Hours	3..90 kg 5kg (100W)



"bringing renewable  
& efficient alternatives  
to home environments"

**BREATHE**  
**SYSTEMS**®

www.breathesystems.com

Switzerland +41 44 586 77 00 | UK +44 121 288 8383 | USA +1 646 217 0888 | Hong Kong +852 8197 2777 | Australia +61 7 3103 3357

specifications are subject to change without notice