

LED PAR20's

SE5WQL-PAR20; SE3x2WQL-PAR20

Low Power Consumption (<6W)

High Brightness (up to 252lm)

Long Life (>30,000hrs)

Easy Installation into E27 Socket

Dimmable (optional)

No UV or IR Radiation



SE5WQL-PAR20

Light Source	5W High Power LED
Number of Bulbs	1
Base Type	E27;E26;E17;E14;E12
Input Voltage	85V to 260V AC (with reverse polarity protection)
Output Power	5W
Luminescence Angle	30°
Input Current	320mA
LED Working Temperature	<62°C
Body Temperature	<53°C
Total Lumens	Up to 210lm
Light Attenuation Quotient	3% to 5% / KH
Range of Colors	Cool White, Warm White, Red, Green, Blue and Yellow
Color Temperature	2800K - 8000K
Power Consumption	5W
Housing	Aluminum
Certifications	CE; RoHS
Warranty	12 Months



SE3x2WQL-PAR20

Light Source	2W High Power LED
Number of Bulbs	3
Base Type	E27;E26;E17;E14;E12
Input Voltage	85V to 260V AC (with reverse polarity protection)
Output Power	6W
Luminescence Angle	30°
LED Working Temperature	<62°C
Body Temperature	<53°C
Total Lumens	Up to 252lm
Light Attenuation Quotient	3% to 5% / KH
Range of Colors	Cool White, Warm White, Red, Green, Blue and Yellow
Color Temperature	2800K - 8000K
Power Consumption	6W
Housing	Aluminum
Certifications	CE; RoHS
Warranty	12 Months



"bringing renewable
& efficient alternatives
to home environments"

BREATHE
SYSTEMS®

www.breathesystems.com

Switzerland +41 44 586 77 00 | UK +44 121 288 8383 | USA +1 646 217 0888 | Hong Kong +852 8197 2777 | Australia +61 7 3103 3357

specifications are subject to change without notice

LED PAR30

SE7x1WQL-PAR30



Low Power Consumption (7W)

High Brightness (up to 315lm)

Long Life (>30,000hrs)

Easy Installation into E27 Socket

Dimmable (optional)

No UV or IR Radiation

Bulb Type	1W PAR30 LED Bulb
Number of Bulbs	7
Base Type	E27
Input Voltage	85V to 260V AC (with reverse polarity protection)
Output Power	7W
Dimension	Φ 95mm x 82mm
Luminescence Angle	30°
Reflector Efficiency	90%
Input Current	320mA
LED Working Temperature	<57°C
Body Temperature	<57°C
Total Lumens	315lm (Cool White); 140lm (Warm White)
Range of Colors	Cool White, Warm White, Red, Green, Blue and Yellow
Net Weight	300g
Color Temperature	2800K - 8000K
Power Consumption	3W
Housing	Aluminum
Certifications	CE; RoHS
Packing	60pcs/Carton
Gross Weight	19kg
Carton Size (mm)	550 x 340 x 430
Warranty	12 Months



specifications are subject to change without notice

"bringing renewable
& efficient alternatives
to home environments"


BREATHE
SYSTEMS[®]

www.breathesystems.com



Switzerland +41 44 586 77 00 | UK +44 121 288 8383 | USA +1 646 217 0888 | Hong Kong +852 8197 2777 | Australia +61 7 3103 3357

LED PAR30

SE7x1WQL-PAR30

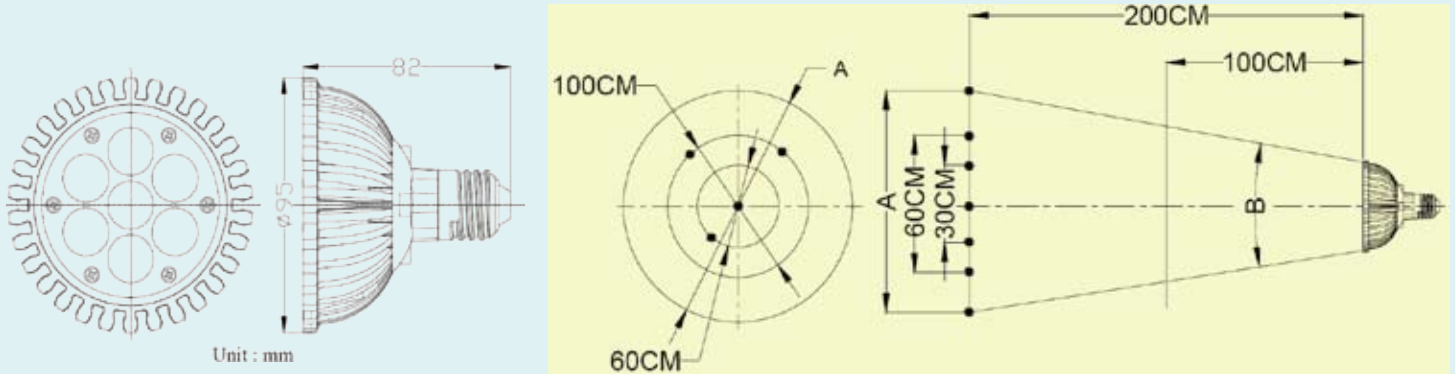

Color	LED Brand	Wavelength / CCT (nm/K)	Luminous Flux	Center Illuminance @ 2m & 1m (Lux)	At 100cm @ 2m (Lux)	At 60cm @ 2m & 1m
Cool White	Luxeon	5500K - 8000K	315	666 / 2665	80	210 / 860

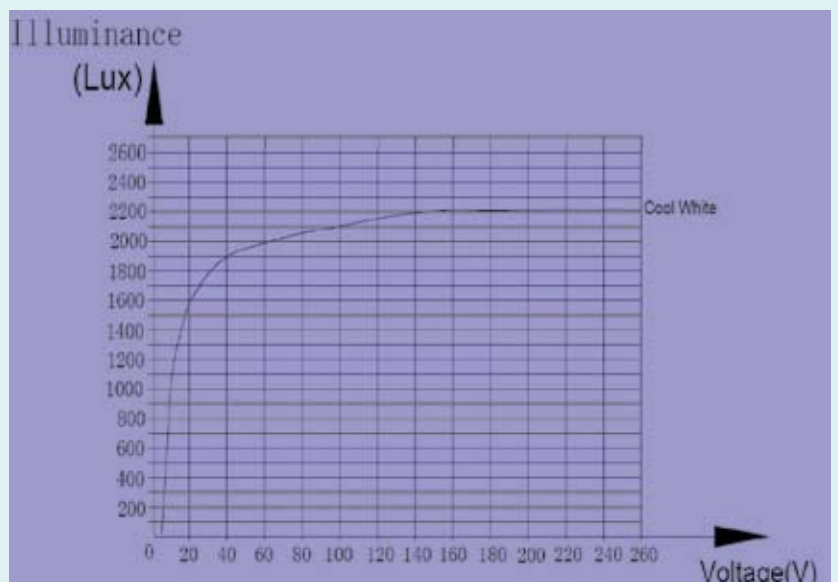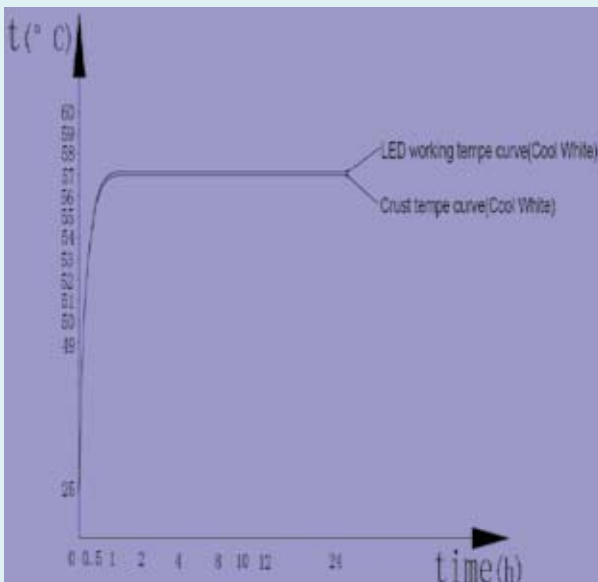

"bringing renewable
& efficient alternatives
to home environments"

BREATHE
SYSTEMS®

www.breathesystems.com

Switzerland +41 44 586 77 00 | UK +44 121 288 8383 | USA +1 646 217 0888 | Hong Kong +852 8197 2777 | Australia +61 7 3103 3357

specifications are subject to change without notice